



Smoke and Fire Curtains

FIRE RATED CURTAIN U

The first fire protective curtain in the world that passed the Hose Stream test according to UL 10B hose stream for 2 hours fire wall in compliance with NFPA 252.

2 hours fire rating according to UL 10B with Hose Stream Test (high stability)

2 HOUR FIRE RATED CURTAIN WITH HOSE STREAM TEST ACCORDING TO UL 10B

PRODUCT DATA SHEET | FIRE RATED CURTAIN U E120 WITH HOSE STREAM

CERTIFICATIONS

NFPA 252


CAN/ULC S104 with hose stream

2 hours fire rating according to **UL 10B with hose stream**

2 hours fire rating according to **UL 10D**

Fire resistance: **E 120**

Classified in compliance with **DIN EN 13501-2**

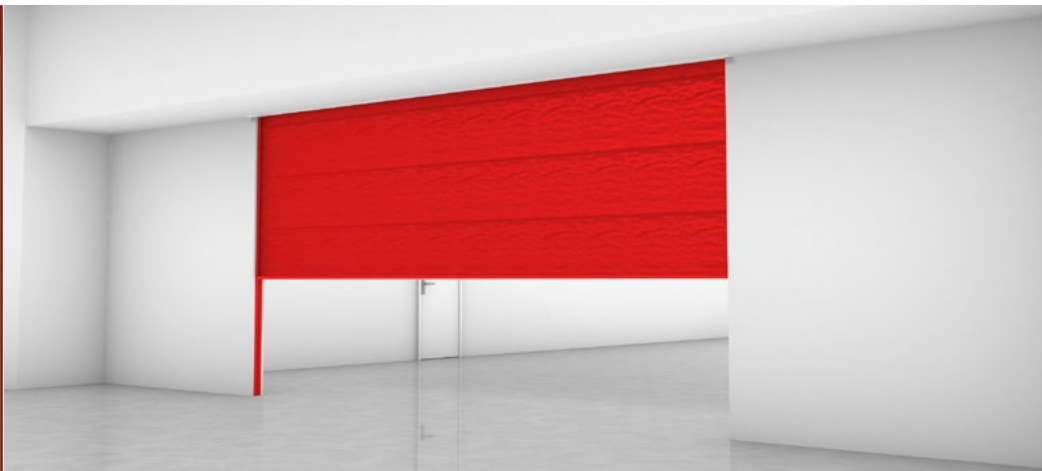

PRODUCT DESCRIPTION

Fire Rated Curtains with hose stream are designed for use as a protective curtain assembly for fire rated steel or wood stud drywall or masonry wall assemblies.


- 2 hours fire rating according to UL 10B with Hose Stream test (high stability)
- Width up to 19' and a large drop length up to 15'
- Drive unit with fail-safe technology (closing without auxiliary power)
- Drive unit with 10,000 cycles

MINIMUM DIMENSIONS

W	H
59 1/16"	59 1/16"

Clear opening width
width between
side guides


Clear opening height
from bottom of housing
to finished floor

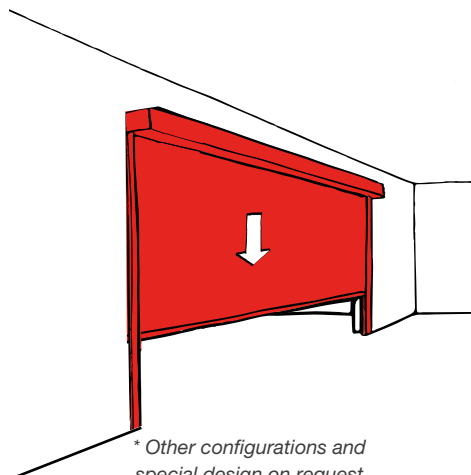


Weight of the system:

26 lbs per linear foot, side guides: 20 lbs per linear foot

MOUNTING TYPES

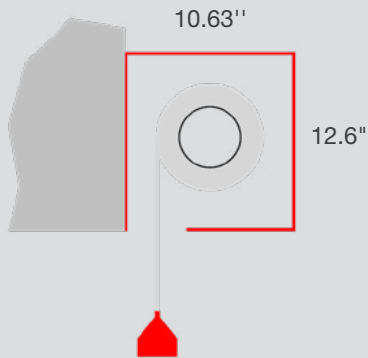


Installation to the wall

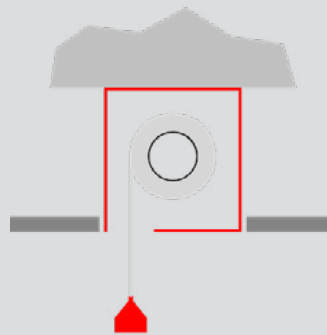

Installation to the ceiling

SIDE GUIDES

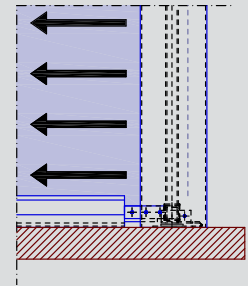

Continuous fabric clamping due to side guiding for high pressures and high tightness

